
Rover


Select the model:

Model 25

Model 75

Model 25



Use this board and clip:

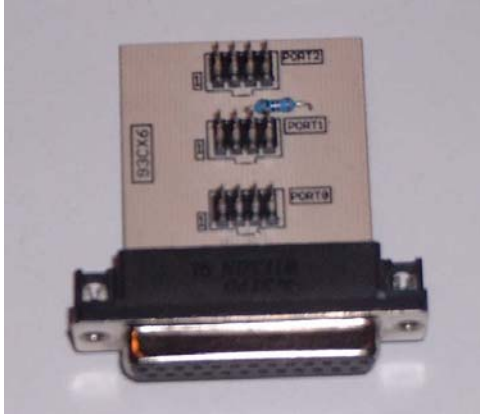

- Remove the cluster and open it.
- Look for the 8 pin chip 93C46.
- Look for the silver chrystal and join its contacts.
- Connect the clip to port 1.
- Put the clip on the chip 93C46 (red on pin 1).
- Select the menu **Rover-Rover 25**
- The Tacho Universal shows you the old value.
- Select the menu **Adjust KM.**
- Enter the new value.
- Verify the new value with **OK.**

Model 75

Use this board and clip:

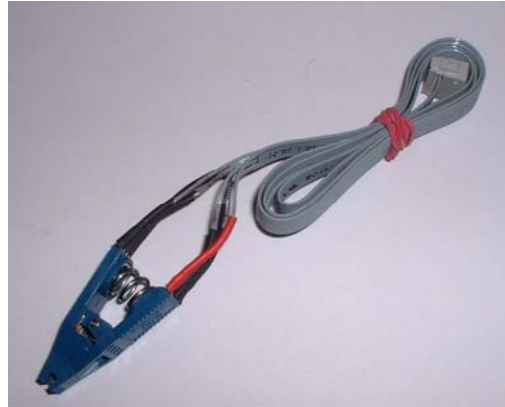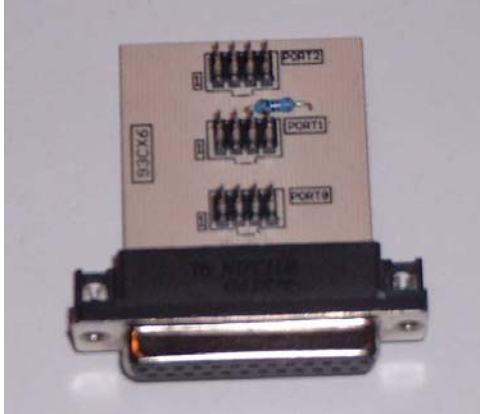

- Remove the cluster and open it (you have to remove the needles).
- Look for the 8 pin chip 93C56.
- Unsolder this chip
- Connect the clip to port 0.
- Put the clip on the chip 93C56 (red on pin 1).
- Select the menu **Rover-Rover 75**
- The Tacho Universal shows you the old value.
- Select the menu **Adjust KM.**
- Enter the new value.
- Verify the new value with **OK.**