
Lancia

Select the model:

Model Kappa new version



Model Kappa old version

Model Lybra

Model Y

Model Kappa new version

Use the Peugeot 406/Fiat/Lancia plug:

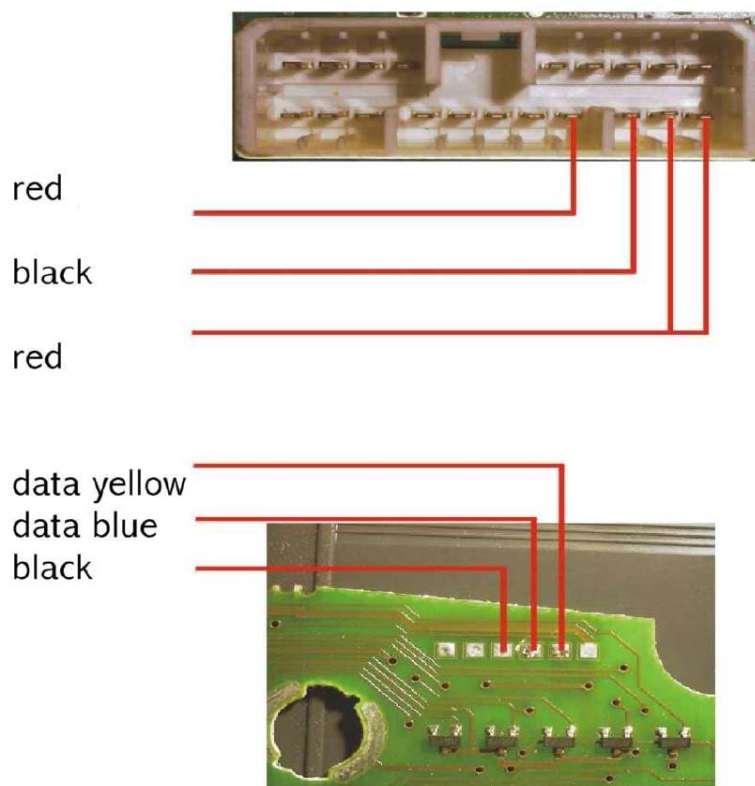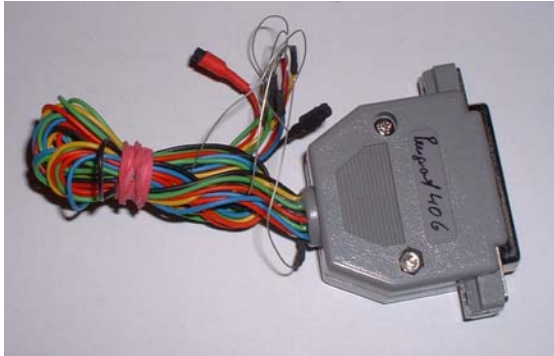



- Remove the cluster and open it.
- Connect the cables as shown in the picture.
- Connect the plug to the Tacho Universal.
- Select the menu: **Lancia-Kappa**.
- The Tacho Universal shows you the old value.
- Enter the new value.
- Verify the new value with **OK**.

Model Kappa old version

If the board looks completely different from the picture, you have the old version.
You have to send this cluster to us to get it programmed.

Model Lybra

Use the Alfa 166 plug:

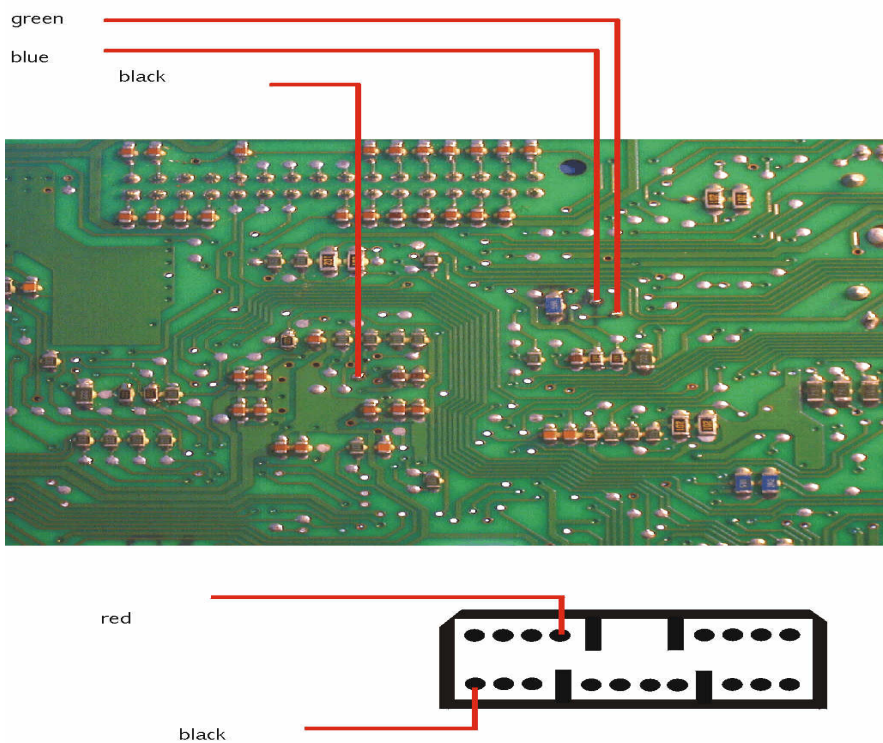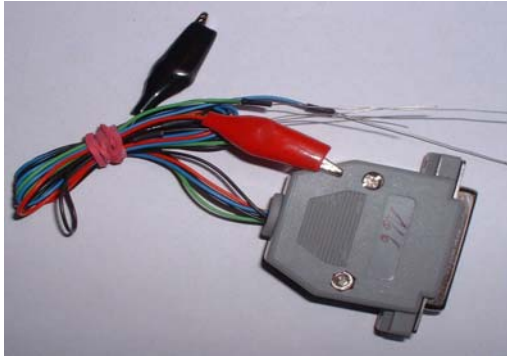


- Remove the cluster and open it.
- Connect the cables as shown in the picture.
- Connect the plug to the Tacho Universal.
- Select the menu **Lancia-Lybra V1**
- The Tacho Universal shows you the old value.
- If it is not correct, try **Lancia-Lybra V2**
or **Lancia-Lybra V3**
- Enter the new value.
- Verify the new value with **OK**.


Model Y

Use the Peugeot 406/Fiat/Lancia plug:





Version 1

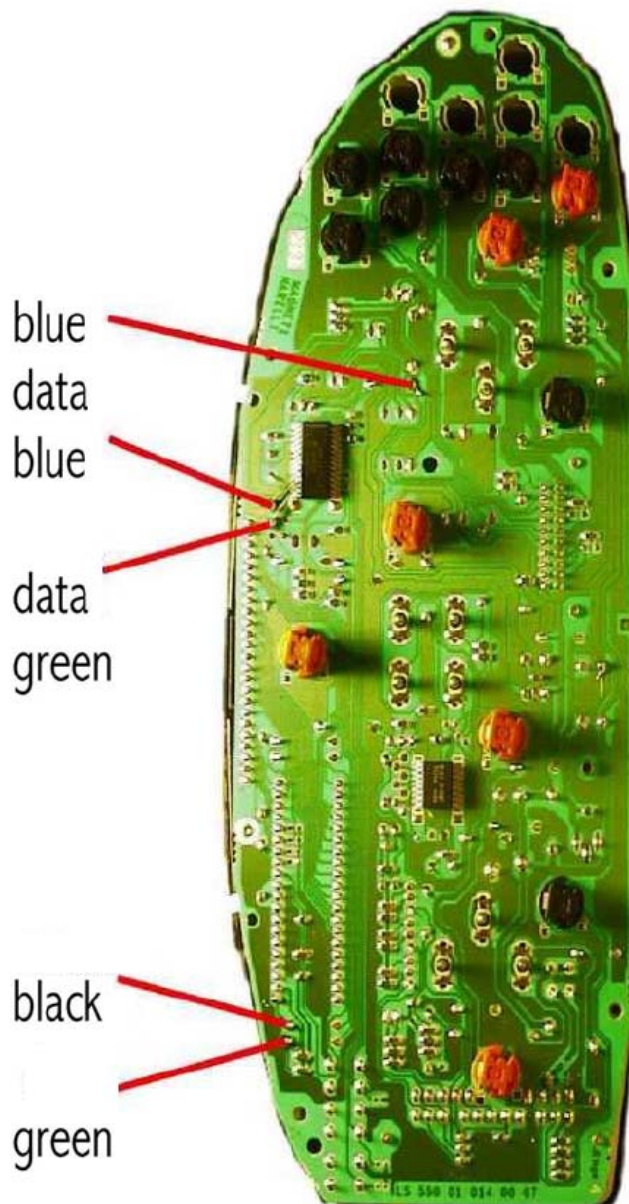

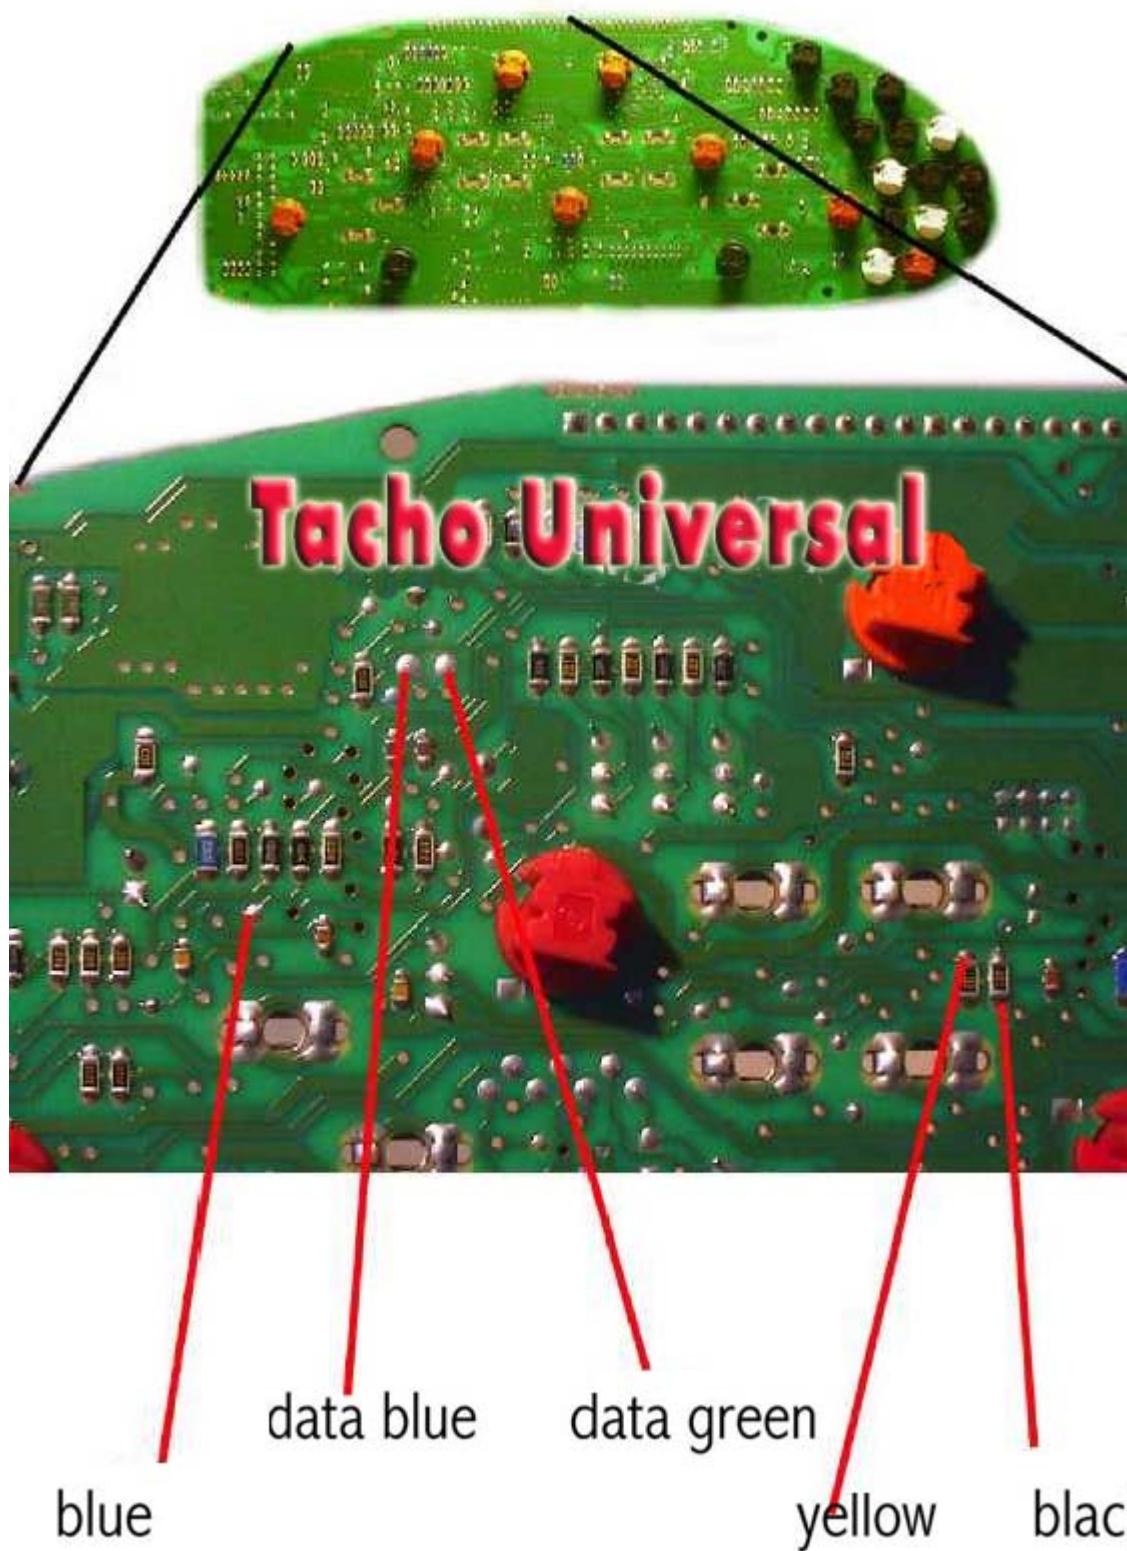

Power supply for both versions:

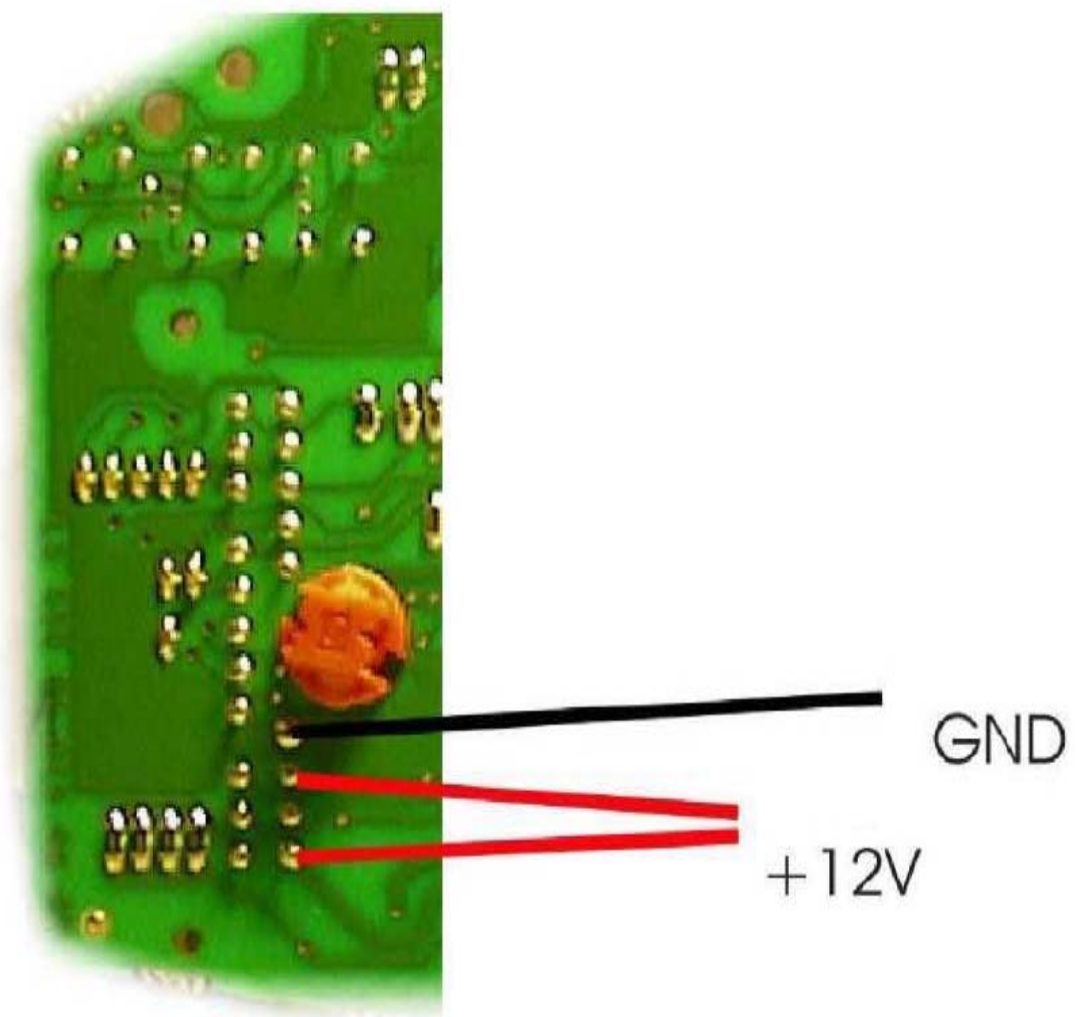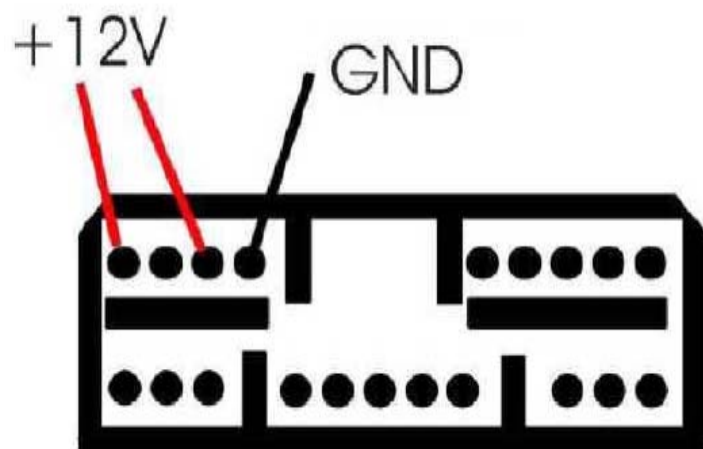

-
- Remove the cluster and open it.
 - Connect the cables as shown in the picture.
 - Connect the plug to the Tacho Universal.
 - Look, what processor it is (QAF, OPT oder 68H).
 - Select the menu **Lancia-Y-Y (QAF/OPT)**
or **Lancia-Y-Y (68H)**
 - The Tacho Universal shows you the old value (not if 68H).
 - Enter the new value.
 - Verify the new value with **OK**.